



P/N: 13264.01

13264.04

**Installation instructions**  
**2007-08 Jeep® Wrangler JK - Neoprene Rear Seat Covers**  
**4-Door Rear Seats**

13264.09

13264.53

- Parts included:** (1) Rear (top & bottom) Left Side Seat Cover - Small  
(1) Rear (top & bottom) Right Seat Cover - Large  
(2) Head Rest Covers

**NOTE: Please read instructions before installing**

**Instructions:**


**Step (1)** Release and slightly fold rear seat forward -Driver Side  
For 2008 and newer JK's pull nylon seat release located on the bottom corner of the seat.

**Step(1)**




**Step (2)** Slip upper seat cover over seat. Note location of head rest slots with Velcro.

**Step (2)**

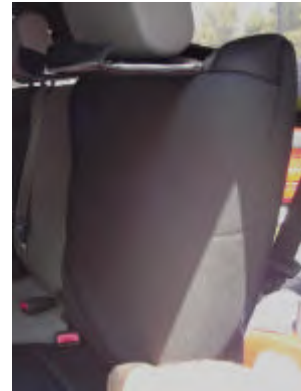


**Step (3)** Slip lower Velcro strip between the upper and lower portions of the seat. and secure.

**Step (3)**

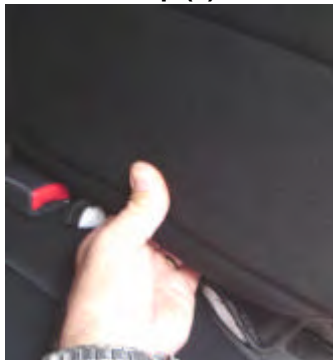

**Step (4)**

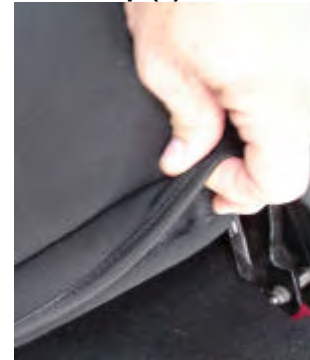

**Step (4)** Secure front and rear Velcro  
As shown. Adjust as needed.

**Step (5)** Pull upper Seat sections through head rest slots.  
**Note: Tilting head rest back will help with install.**  
Secure front & rear Velcro flaps.

**Step (5A)**



**Step (5B)**



**Note:** on 2008 and newer models the seat release is deleted from the top. Flip the supplied flap over the top of the seat and stuff under cover (5B)

**Step (6)** Slip smaller lower seat cover into bottom of seat. Push rear of cover (with clips) between top and bottom of seat. Folding seat forward will ease installation.






**Step (7)** With front of cover pulled over seat run nylon straps and clips under seat. Secure to back clips and pull tight.

**NOTE: DO NOT OVER TIGHTEN**  
**Damage to seat cover may result.**

**Step (6)**



**Step (7)**



**Step (8)** Slide side clips between seats and secure to underside of seat.

**Step (8)**



**Step (10A)**




**Step (9)** Repeat steps 6 - 8 for the right side lower seat.

**Step (10)** Unzip large right side upper cover. Slip around seat as Shown in steps 10A and 10B. Seat belt must be slid through opening before zipping.

**Step (10B)**



**Step (11)**



**Step (11)** Push lower Velcro flaps between the upper and lower seat and secure together.

**Step (12)** Pull upper Seat sections through head rest slots.  
**Note: Tilting head rest back will help with install.**  
 Secure front & rear Velcro flaps.

**Step (12A)**



**Step (12B)**



**Note:** on 2008 and newer models the seat release is deleted from the top. Flip the supplied flap over the top of the seat and stuff under cover (12B)

**Step (13)** Slide covers over head rest as shown.

