



# WARN® ZEON™ 10-S Winch


Truck/SUV winch equipped with Spydura™ synthetic rope and a 10,000 lb. capacity.

**The next generation of winches is here: WARN® ZEON™. With a modern rugged design, upgraded internal components, and increased performance and durability, ZEON is a new name from the most trusted name in winches. With a bold look and power to match, the ZEON is like nothing you've ever seen before.**

- Legendary WARN reliability and performance; 10,000 lb. (4536 kg) capacity – perfect for heavier trucks and SUVs
- Includes 100' of 3/8" WARN Spydura™ synthetic rope, a temperature-resistant sleeve on the first layer, a ballistic nylon sliding sleeve for abrasion resistance, and a polished aluminum hawse fairlead
- Unique exterior styling and symmetrical design give this winch a look that is advanced, capable, and strong
- New-design planetary geartrain and series-wound motor deliver fast, quiet, and reliable pulling power
- Satin-black powder-coated finish with stainless steel fasteners and clutch lever looks great and inhibits corrosion
- Ultra-durable rubberized corded remote with 12' lead
- Convertible control pack can be attached to the winch or remotely mounted, allowing for various winch mounting options and looks (Relocation kit required and sold separately)
- Large diameter, aluminum winch drum reduces rope wear, is light weight, and has an integrated rope anchor for easy rope installation
- Robust aluminum housing is durable and helps dissipate heat
- Improved winch sealing to keep the elements out; IP68 rated
- Contactor control for extreme reliability and weather resistance
- Automatic mechanical cone brake holds the full-rated load and offers excellent control while winching

PN 89611 (for International sales only)



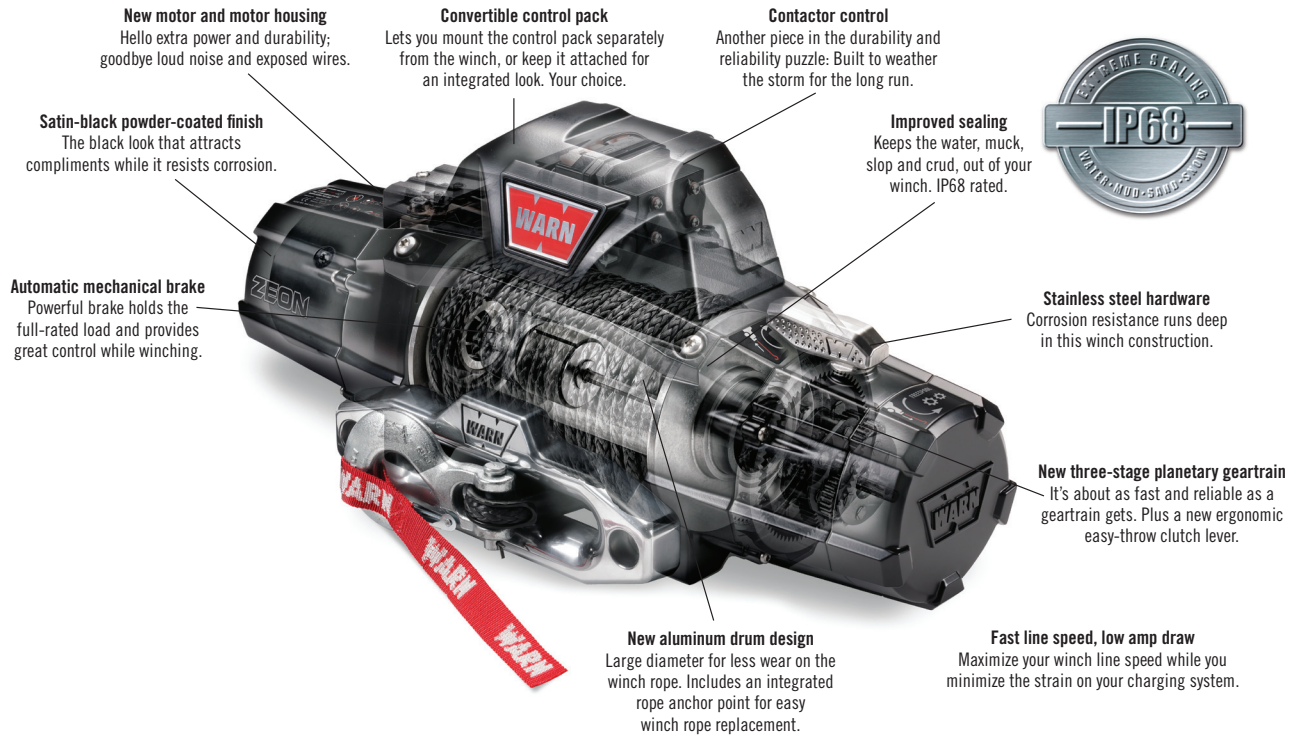

## SPECIFICATIONS

**Winch model:** WARN ZEON 10-S

**Part numbers:** 89611 (CE, for International sales only)

**Rated line pull:** 10,000 lbs. (4536 kg) single-line

**Motor:** 12V DC, series wound

**Electrical controls:** Contactor

**Remote Control:** Remote switch, 12' (3.7m) lead

**Geartrain:** 3-stage planetary

**Gear ratio:** 216:1

**Clutch (freespooling):** Rotating ring gear

**Brake:** Automatic mechanical cone

**Drum diameter/Length:** 3.15"/9.0" (80mm/229mm)

**Weight (kit shipping):** 75 lbs. (34 kg)

**Rope:** 3/8" x 100' (9.5mm x 30.5m) Spydura synthetic

**Fairlead:** Hawse


**Recommended Battery:** 650 CCA minimum for winching

**Battery leads:** 2 gauge, 72" (1.83m)

**Finish:** Satin-black powder coat

### 12V DC performance specs (first layer of drum)

Line Pull Lbs. (Kg)	Line Speed Ft./min. (M/min.)	Motor Current
0	33.7 (10.3)	62 amps
2000 (910)	14.9 (4.5)	144 amps
4000 (1810)	11.2 (3.4)	215 amps
6000 (2720)	8.5 (2.6)	280 amps
8000 (3630)	6.5 (1.9)	343 amps
10000 (4536)	4.8 (1.5)	409 amps

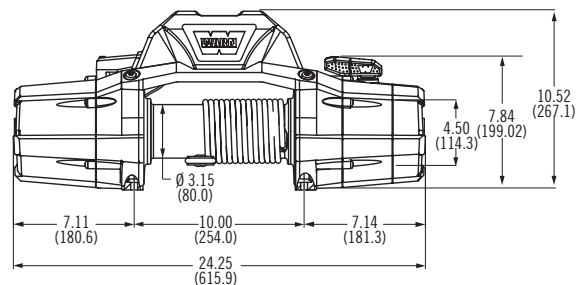

### Winch dimensions:

Integrated configuration: 24.25" L x 7.15" D x 10.52" H  
(615.9mm L x 181.6mm D x 267.1mm H)

Low-profile configuration: 24.25" L x 7.15" D x 7.84" H  
(615.9mm L x 181.6mm D x 199.02mm H)

### Mounting bolt pattern:

10.0" x 4.5"  
(254mm x 114.3mm)

**Warn Industries, Inc.**  
12900 S.E. Capps Road,  
Clackamas, OR USA 97015-8903



International Sales Support:

+1 503 722 1200

[www.warn.com](http://www.warn.com)