

**Rugged
Ridge**

**OUTLAND
AUTOMOTIVE**

P/N: 13264.01

Installation instructions

2007-08 Jeep® Wrangler JK - Neoprene Rear Seat Covers
4-Door Rear Seats

13264.04

13264.09

13264.53

Parts included: (1) Rear (top & bottom) Left Side Seat Cover - Small
(1) Rear (top & bottom) Right Seat Cover - Large
(2) Head Rest Covers

NOTE: Please read instructions before installing


Instructions:

Step (1) Release and slightly fold rear seat forward -Driver Side
For 2008 and newer JK's pull nylon seat release located on the bottom corner of the seat.




Step(1)

Step (2) Slip upper seat cover over seat. Note location of head rest slots with Velcro.

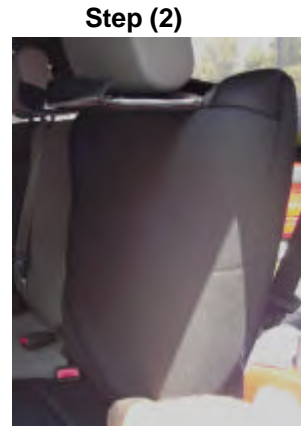


Step (2)

Step (3) Slip lower Velcro strip between the upper and lower portions of the seat. and secure.

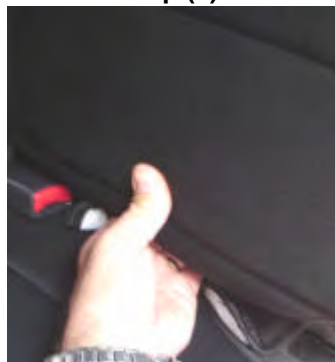

Step (3)

Step (4) Secure front and rear Velcro
As shown. Adjust as needed.

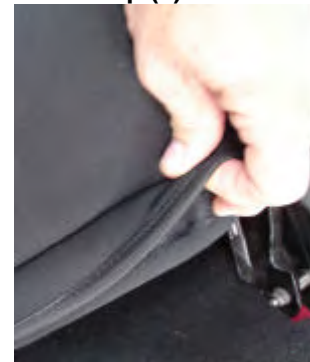

Step (4)

Step (5) Pull upper Seat sections through head rest slots.
Note: Tilting head rest back will help with install.
Secure front & rear Velcro flaps.



Step (5A)

Note: on 2008 and newer models the seat release is deleted from the top. Flip the supplied flap over the top of the seat and stuff under cover (5B)

Step (6) Slip smaller lower seat cover into bottom of seat. Push rear of cover (with clips) between top and bottom of seat. Folding seat forward will ease installation.



Step (5B)




Step (7) With front of cover pulled over seat run nylon straps and clips under seat. Secure to back clips and pull tight.

NOTE: DO NOT OVER TIGHTEN
Damage to seat cover may result.

Step (6)



Step (7)



Step (8) Slide side clips between seats and secure to underside of seat.

Step (8)



Step (10A)




Step (9) Repeat steps 6 - 8 for the right side lower seat.

Step (10) Unzip large right side upper cover. Slip around seat as Shown in steps 10A and 10B. Seat belt must be slid through opening before zipping.

Step (10B)



Step (11)

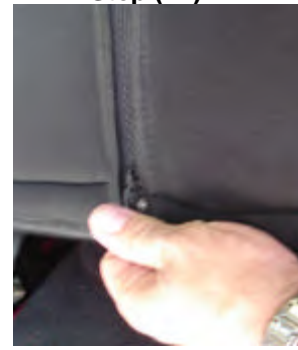


Step (11) Push lower Velcro flaps between the upper and lower seat and secure together.

Step (12) Pull upper Seat sections through head rest slots.
Note: Tilting head rest back will help with install.
 Secure front & rear Velcro flaps.

Step (12A)



Step (12B)



Note: on 2008 and newer models the seat release is deleted from the top. Flip the supplied flap over the top of the seat and stuff under cover (12B)

Step (13) Slide covers over head rest as shown.

