

# LED Headlights - Model 8900 Evolution 2

## PRODUCT INFORMATION

|                                      |                                                                                        |
|--------------------------------------|----------------------------------------------------------------------------------------|
| <b>Description</b>                   | 12-24V DOT/ECE LED RHT High & Low Beam Headlight with Black Inner Bezel - Single Light |
| <b>Height</b>                        | 141.99 mm / 5.59 in                                                                    |
| <b>Width</b>                         | 199.90 mm / 7.87 in                                                                    |
| <b>Depth</b>                         | 95.00 mm / 3.74 in                                                                     |
| <b>Shape</b>                         | Rectangular                                                                            |
| <b>Outer Lens Material</b>           | Polycarbonate                                                                          |
| <b>Outer Lens Color</b>              | Clear                                                                                  |
| <b>Housing Material</b>              | Die-Cast Aluminum                                                                      |
| <b>Housing Color</b>                 | Black                                                                                  |
| <b>Bezel Color</b>                   | Black                                                                                  |
| <b>Retrofits</b>                     | 2B1 5" X 7" Headlights                                                                 |
| <b>Minimum Operating Temperature</b> | -40 °C / -40 °F                                                                        |
| <b>Maximum Operating Temperature</b> | 65 °C / 149 °F                                                                         |
| <b>Connector or Wiring</b>           | H4                                                                                     |
| <b>Mating Connector</b>              | H4 AMP#172615-2                                                                        |
| <b>Product Weight</b>                | 2.63 lbs / 1.19 kgs                                                                    |
| <b>Shipping Weight</b>               | 3.76 lbs / 1.71 kgs                                                                    |




Print date: 2021-04-27

© 2021 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER®**  
Engineered. Lighting. Solutions.

# LED Headlights - Model 8900 Evolution 2

## PRODUCT DIMENSIONS

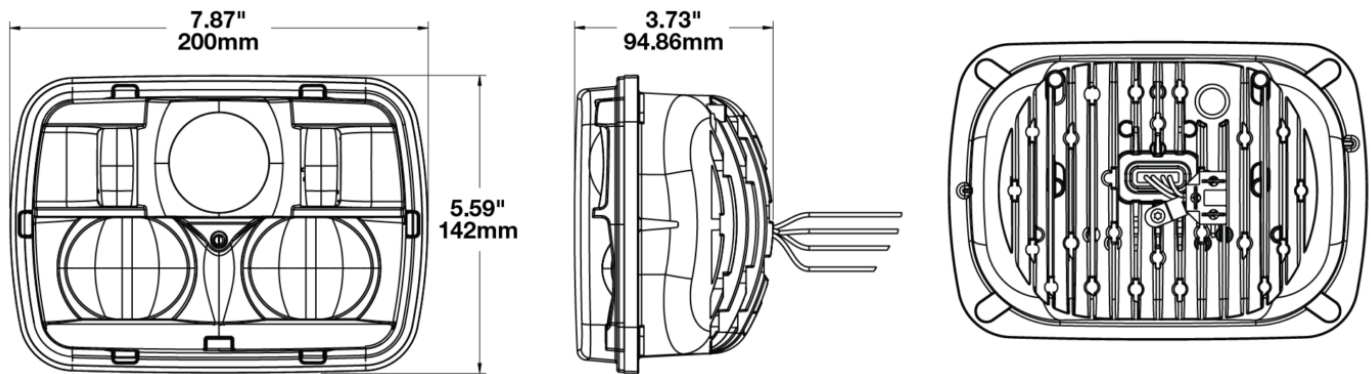

## ELECTRICAL SPECIFICATIONS

|                                   |                                                                                                                                                                                          |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Input Voltage</b>              | 12-24V DC                                                                                                                                                                                |
| <b>Operating Voltage</b>          | 10-32V DC                                                                                                                                                                                |
| <b>Transient Spike Protection</b> | 150V Peak @ 1 HZ-100 Pulses                                                                                                                                                              |
| <b>Black Wire</b>                 | Ground                                                                                                                                                                                   |
| <b>Yellow Wire</b>                | Low Beam                                                                                                                                                                                 |
| <b>White Wire</b>                 | High Beam                                                                                                                                                                                |
| <b>Red Wire</b>                   | Front Position*                                                                                                                                                                          |
| <b>Current Draw</b>               | 1.94A @ 12V DC (High Beam)<br>1.67A @ 12V DC (Low Beam)<br>0.22A @ 12V DC (Front Position)<br>1.03A @ 24V DC (High Beam)<br>0.87A @ 24V DC (Low Beam)<br>0.16A @ 24V DC (Front Position) |

Print date: 2021-04-27

© 2021 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# LED Headlights - Model 8900 Evolution 2


## REGULATORY STANDARDS COMPLIANCE



|                               |                             |
|-------------------------------|-----------------------------|
| Buy America Standards         | ECE Reg 10                  |
| ECE Reg 112                   | ECE Reg 7                   |
| Eco Friendly                  | FMVSS 108 s10.1 (Table XIX) |
| FMVSS 108 s10.1 (Table XVIII) | IEC IP69K                   |

## PHOTOMETRIC SPECIFICATIONS

|                               |                                                                                                                   |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------|
| <b>Raw Lumen Output</b>       | 2,640 (High Beam); 2,250 (Low Beam)                                                                               |
| <b>Effective Lumen Output</b> | 1,200 (High Beam); 975 (Low Beam)                                                                                 |
| <b>Beam Pattern(s)</b>        | Forward Lighting - High Beam (DOT/ECE)<br>Forward Lighting - Low Beam (DOT/ECE)<br>Signalization - Front Position |

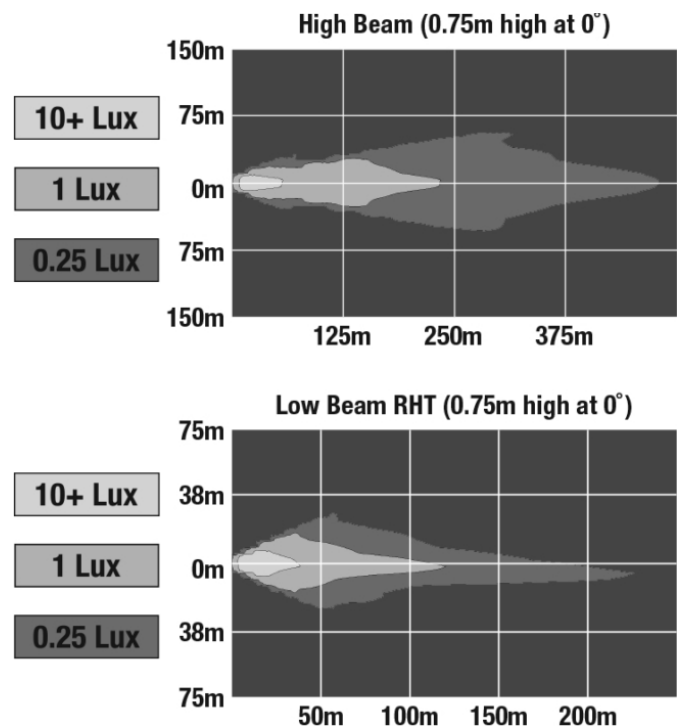

Print date: 2021-04-27

© 2021 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# LED Headlights - Model 8900 Evolution 2

## APPLICATIONS

---



## ADDITIONAL INFORMATION

---

\*Front position light is a requirement outside of North America. If your vehicle is operated in North America, you do not need to connect this wire unless your vehicle is equipped with a front position light.

## PRODUCT WARNINGS

---

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## ACCESSORIES

---



### **Part Number** **8000381**

H4/H4 Anti-Flicker  
Harness for J.W.  
Speaker LED  
headlights

---

Print date: 2021-04-27

© 2021 J.W. Speaker Corporation • Germantown, WI U.S.A.  
[www.jwspeaker.com](http://www.jwspeaker.com) • [speaker@jwspeaker.com](mailto:speaker@jwspeaker.com) • 262.251.6660

**J.W. SPEAKER®**  
*Engineered. Lighting. Solutions.*

# LED Headlights - Model 8900 Evolution 2

## RELATED PRODUCTS

---



**Part Number**  
**0554431**

12-24V ECE LED LHT  
High & Low Beam  
Headlight with Chrome  
Inner Bezel - Single  
Light



**Part Number**  
**0554451**

12-24V ECE LED LHT  
High & Low Beam  
Headlight with Black  
Inner Bezel - Single  
Light



**Part Number**  
**0554471**

12-24V DOT/ECE LED  
RHT High & Low Beam  
Headlight with Chrome  
Inner Bezel - Single  
Light